


FOAM MOUNTING TAPE

Venture Tape 732 is a 31.25 mil (0.8mm) double coated polyethylene foam tape designed for mounting, sealing, gasketing, and sound and vibration damping applications. The highly conformable foam, coupled with a high performance acrylic adhesive, creates a reliable bond on a wide variety of high and low energy surfaces, providing optimum performance and durability.

Product Construction

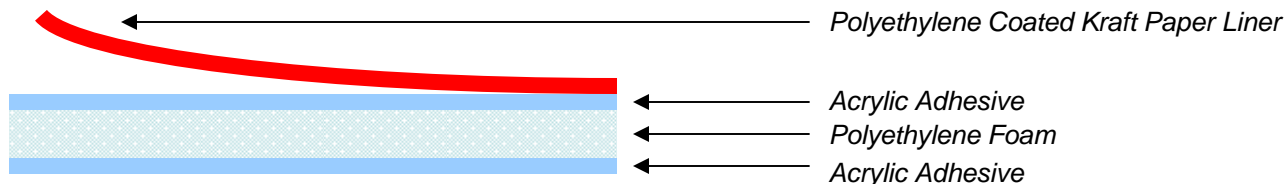

Features & Benefits

- Excellent performance on a wide variety of materials and surfaces
- Easy die cutting is ideal for nameplate mounting applications
- Medium density polyethylene foam combines easy installation with superior impact resistance
- Provides a strong, durable bond on smooth and irregular surfaces
- High conformability is ideal for most interior and exterior automotive applications
- Excellent temperature resistance and humidity performance

| Test | Typical Value | Typical Value (Metric) | Test Method |
|-----------------------------------|-----------------|------------------------|-------------|
| Total Product Thickness | 35.8 mils | 0.9 mm | PSTC-133 |
| Thickness (Exposed Adhesive) | 2.3 mils | 57.2 µm | PSTC-133 |
| Thickness (Carrier) | 31.3 mils | 0.8 mm | PSTC-133 |
| Thickness (Liner Adhesive) | 2.3 mils | 57.2 µm | PSTC-133 |
| Thickness (Liner) | 4.7 mils | 119.4 µm | PSTC-133 |
| Peel Adhesion (Exposed Adhesive) | 90 oz/in | 25.0 N/25mm | PSTC-101 |
| Peel Adhesion (Liner Adhesive) | 90 oz/in | 25.0 N/25mm | PSTC-101 |
| Shear Strength (Exposed Adhesive) | >100 hours | >100 hours | PSTC-107 |
| Shear Strength (Liner Adhesive) | >100 hours | >100 hours | PSTC-107 |
| Tensile Strength | 6.0 lb/in width | 27 N/25mm width | PSTC-131 |
| Elongation | 300 % | 300 % | PSTC-131 |
| Minimum Application Temperature | 30 °F | -1 °C | |
| Maximum Continuous Temperature | 200 °F | 93 °C | |
| Maximum Intermitant Temperature | 250 °F | 121 °C | |

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Available in black and white
- Standard roll sizes and custom rolls available on request
- Slit rolls: minimum width 0.25"
- Liner options: contact Venture Tape for available liners

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076

From United Kingdom 0-800-962-957

From Australia 1-800-122-797

www.venturetape.com

www.boma.it

VentureTape®

BOMA
Venture Tape Group

USA

Venture Tape Corp.
30 Commerce Road
Rockland, MA 02370
781-331-5900
FAX 781-871-0065

Europe – BOMA

BOMA s.r.l.
Via Aquileia 22/30
34070 Villesse (GO)
Italy
0481 96431 1
FAX 0481 91440

Europe – Venture Tape

Venture Tape Europe Corp.
Units 5 – 6, Faraday Close,
Drayton Fields, Daventry,
Northamptonshire, England NN11 8RD
(0) 1327 876555
FAX (0) 1327 876444

Australasia

Venture Tape Australasia, Pty., Ltd.
90A Northgate Drive
Thomastown 3074 Victoria
Australia
(03) 9464 2089
FAX (03) 9464 7268