


FOAM MOUNTING TAPE

Venture Tape 932 is a high performance 31.5 mil (0.8mm) double coated polyethylene foam tape designed for high stress applications such as mirror mounting, vanities, mirrored wardrobes and other demanding installations. The highly conformable foam, coupled with a high performance adhesive, creates a reliable bond on a wide variety of high and low energy surfaces, providing optimum performance and durability.

Product Construction

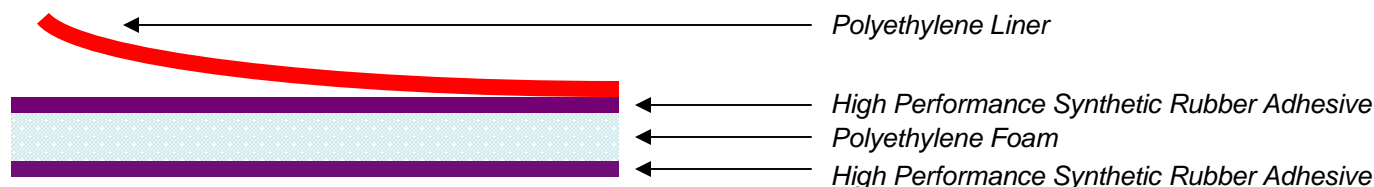

Features & Benefits

- Excellent adhesion to glass, PVC, wood, aluminum and steel as well as a wide variety of painted and unpainted surfaces
- Closed cell polyethylene foam combines easy installation with superior performance, providing excellent sealant and structural characteristics
- Provides a strong, durable bond on irregular surfaces
- High conformability is ideal for most interior and exterior applications
- Excellent temperature performance and humidity resistance

Test	Typical Value	Typical Value (Metric)	Test Method
Total Product Thickness	35.5 mils	0.9 mm	PSTC-133
Thickness (Exposed Adhesive)	2.0 mils	50.8 µm	PSTC-133
Thickness (Carrier)	31.5 mils	0.8 mm	PSTC-133
Thickness (Liner Adhesive)	2.0 mils	50.8 µm	PSTC-133
Thickness (Liner)	5.0 mils	127.0 µm	PSTC-133
Peel Adhesion (Exposed Adhesive)	150 oz/in	41.7 N/25mm	PSTC-101
Peel Adhesion (Liner Adhesive)	150 oz/in	41.7 N/25mm	PSTC-101
Shear Strength (Exposed Adhesive)	>168 hours	>168 hours	PSTC-107
Shear Strength (Liner Adhesive)	>168 hours	>168 hours	PSTC-107
Tensile Strength	7.1 lb/in width	32 N/25mm width	PSTC-131
Elongation	350 %	350 %	PSTC-131
Minimum Application Temperature	50 °F	10 °C	
Maximum Continuous Temperature	180 °F	82 °C	
Maximum Intermitant Temperature	225 °F	107 °C	

Typical values are not intended to be used for specification development. Technical data is believed to be true and accurate; Venture Tape recommends that the purchaser test for fitness of use in all applications.

Product Configurations

- Standard roll sizes and custom rolls available on request
- Slit rolls: minimum width 0.25"
- Liner options: contact Venture Tape for available liners

Contact Venture Tape today for a complete list of products or a free sample

Toll Free North America 800-343-1076
 From United Kingdom 0-800-962-957
 From Australia 1-800-122-797
www.venturetape.com



USA

Venture Tape Corp.
 30 Commerce Road
 Rockland, MA 02370
 781-331-5900
 FAX 781-871-0065

Europe

Venture Tape Europe Corp.
 Units 5 – 6, Faraday Close,
 Drayton Fields, Daventry,
 Northamptonshire, England NN11 5RD
 (0) 1327 876555
 FAX (0) 1327 876444

Australasia

Venture Tape Australasia, Pty., Ltd.
 90A Northgate Drive
 Thomastown 3074 Victoria
 Australia
 (03) 9464 2089
 FAX (03) 9464 7268